



FLOW CURVES

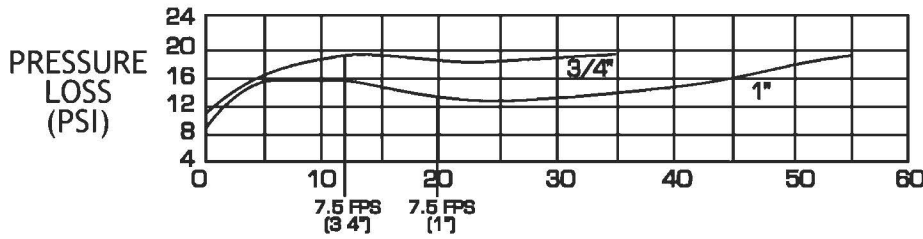



Model 40-200
"U" & "Z" Flow

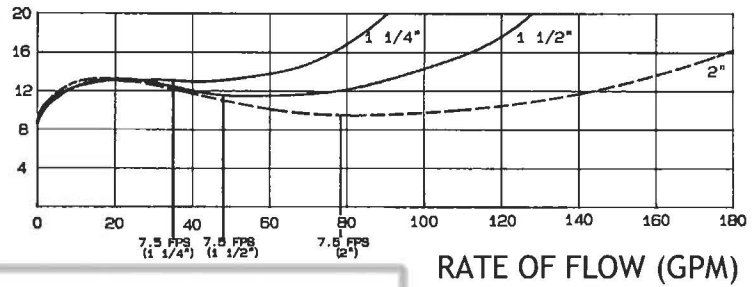

RATE OF FLOW (GPM)

DIMENSIONS & WEIGHTS

Body Size	3/4"	1"	1-1/4"	1-1/2"	2"
A	10-1/2	10-13/16	14-3/8	15-1/8	15-3/4
B	8	8	11	11	11
C	4-1/8	5-1/4	6	6-5/8	7-5/8
D	5	5	5-3/4	5-7/8	6-1/4
E	13-1/2	15-1/8	18-5/8	20-3/4	22-1/8
F	3-1/4	3-1/4	4-3/4	4-3/4	4-3/4
G	5-1/8	5-1/8	7-1/8	7-1/8	7-1/8
Test Cocks	1/8x1/4 NPT	1/8x1/4NPT	1/4x1/4NPT	1/4x1/4NPT	1/4x1/4NPT
Net Wt. (with Ball Valves)	14.7	15.6	37-1/2	39-3/8	43-3/4
Shipping Wt. (with Ball Valves)	15.7	16.6	40	41-3/8	

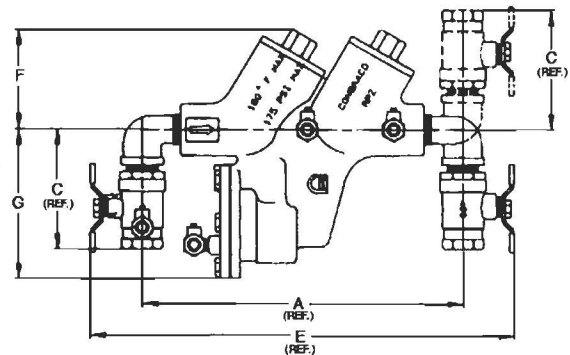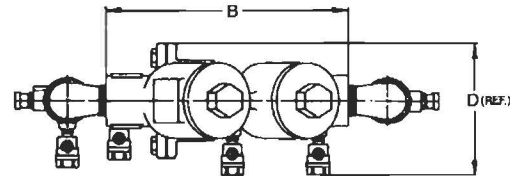

REPAIR PARTS

For internal parts and repair kits, please see model 40-200 parts pages.



ORDERING NUMBERS

4 0 - 2 0 X - A 2 X

4 - 3/4"

5 - 1"

6 - 1 1/4"

7 - 1 1/2"

8 - 2"

2 With ball valves

U - U-Flow

Z - Z-Flow

American Backflow Specialties

www.americanbackflow.com

(800) 66-BKFLO

(619) 527-2525

Fax: (619) 527-2527