




## 300AR Series Backflow Preventer Order Form

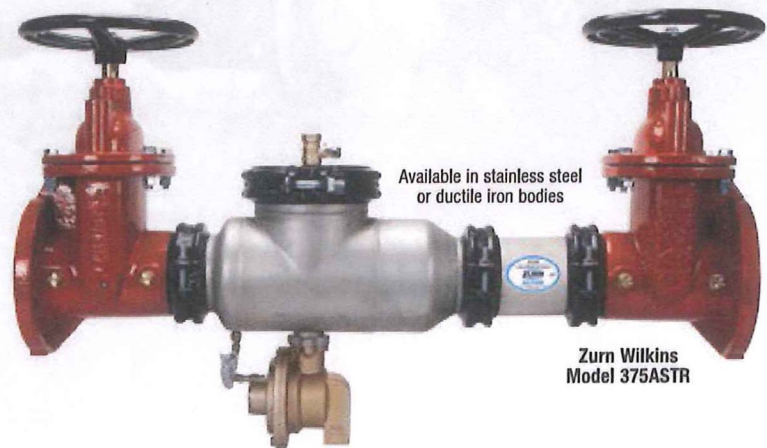

Available in stainless steel  
or ductile iron bodies

Zurn Wilkins  
Model 375ASTR

US Patent No. 8,997,772

### Custom-Length Assembly Replacement Save time and money during backflow replacement

#### Features and Benefits

- 300AR drop-in assembly drastically reduces installation time and building's water down time, making it the ideal solution for retrofit and replacement installations
- Superior performance of the 300 series provides the lowest life-cycle cost through ease of maintenance, repair, and readily available low cost repair kits
- Shut-offs remain in the same location as previous installation, enabling tamper switches to be re-installed without modifying electrical wiring
- Shipped fully assembled with custom length AR spool, eliminating field cutting and spool assembly
- Measure and submit the current flange face-to-face dimension and your 300AR will be built to match the current footprint
- 48 hour shipment from any of Zurn's 5 regional service centers speeds delivery and maximizes up-time



1-855-ONE-ZURN  
[www.zurn.com](http://www.zurn.com)

**American Backflow Specialites**

(800) 662-5356 (619) 527-2525 FAX (619) 527-2527 [www.americanbackflow.com](http://www.americanbackflow.com)

# Zurn Wilkins 300AR Series Order Form

Company Name \_\_\_\_\_ Contact \_\_\_\_\_  
 Address \_\_\_\_\_ Phone \_\_\_\_\_  
 City \_\_\_\_\_ Email \_\_\_\_\_  
 State \_\_\_\_\_ Zip Code \_\_\_\_\_  
 Project Location \_\_\_\_\_ Rep Agency \_\_\_\_\_  
 \_\_\_\_\_ Rep Contact \_\_\_\_\_  
 Ship Date \_\_\_\_\_

**For Zurn Wilkins Customer Care Use Only**

Sales Order # \_\_\_\_\_ PO # \_\_\_\_\_ Part # \_\_\_\_\_

**Order Information**

	Ductile Iron Body Standard Valve (Lead Free)	Ductile Iron Body Detector Assembly (Lead Free)	Stainless Steel Body Standard Valve (Lead Free)	Stainless Steel Detector Assembly (Lead Free)
Double Check	350AR <input type="checkbox"/>	350ADAR <input type="checkbox"/>	350ASTR <input type="checkbox"/>	350ASTDAR <input type="checkbox"/>
Reduced Principle	375AR <input type="checkbox"/>	375ADAR <input type="checkbox"/>	375ASTR <input type="checkbox"/>	375ASTDAR <input type="checkbox"/>
Size	2-1/2" <input type="checkbox"/>	3" <input type="checkbox"/>	4" <input type="checkbox"/>	6" <input type="checkbox"/>
	8" <input type="checkbox"/>	10" <input type="checkbox"/>	Other Details (include if "DOM" needed) <input type="checkbox"/>	
Inlet Gate Valve	NRS <input type="checkbox"/>	OS&Y <input type="checkbox"/>	Butterfly <input type="checkbox"/>	PI <input type="checkbox"/>
Outlet Gate Valve	NRS <input type="checkbox"/>	OS&Y <input type="checkbox"/>	Butterfly <input type="checkbox"/>	PI <input type="checkbox"/>
Inlet End Connection	Flanged <input type="checkbox"/>	Grooved <input type="checkbox"/>		
Outlet End Connection	Flanged <input type="checkbox"/>	Grooved <input type="checkbox"/>		

For DA model, select meter option:  
 GPM - with gpm meter (standard)  SCFM - with Sensus cu ft meter  CFM - with cu ft meter  CMM - with cu meter meter

300AR Series valve orders are non-cancellable and non-returnable. Signing this form guarantees the face to face dimensions to be accurate.

Valve Type Being Replaced (Submit a separate form for each replacement backflow)

Manufacturer \_\_\_\_\_ Model \_\_\_\_\_

Face to Face Dimension (exact field measurement) of the existing backflow preventer, including shut-offs (see image below)\*\*  
 (± 1/16") \_\_\_\_\_

Customer Signature to Guarantee Field Measurement \_\_\_\_\_ Date \_\_\_\_\_

Minimum Face to Face Dimension (overall lay length)				
Valve Size	Ductile Iron Body		Stainless Steel Body*	
	Gate Valves	Butterfly Valves	Gate Valves	Butterfly Valves
2 1/2"	37-1/8"	34-1/8"	34"	31"
3"	38-1/8"	34-5/8"	35"	31-1/2"
4"	40-1/2"	35-3/4"	37-3/8"	32-5/8"
6"	49-1/2"	42-1/2"	46"	39"
8"	64-7/8"	57-7/8"	55-3/4"	48-3/4"
10"	67-3/8"	61-3/8"	58-5/8"	52-5/8"

Maximum Lengths			
Valve Size	Length Range "A"	Length Range "B"	Length Range "C"
2 1/2"	47-1/8"		
3"	48-1/8"		
4"	50"	62-1/4"	
6"	59"	71-1/4"	
8"	74"	86"	
10"	77"	89"	100-5/8"

Custom lengths longer than shown are available.  
 \* Stainless steel backflow body is slightly shorter than ductile iron body.  
 \*\*If ordered as a single part number including ancillary equipment such as wye strainers, the face to face length will be inclusive of that ancillary equipment, however the components may ship separately.

